

Mini-type 3G-SDI to Fiber Converter with Tally & Reverse RS485

Features


- ▶ Each channel includes 8-channel audio embedded;
- ▶ Automatic cable equalization, used for all rate below 3.2 Gb/s (Belden 1694A);
- ▶ Automatic reclocking 270Mbit/s - 1.48Gbit/s - 3Gbit/s
- ▶ Directly compatible with SDI camera systems
- ▶ Long transmission capability up to 80 km
- ▶ Hot swap and hot plug;
- ▶ Handle all Pathological patterns, fully digital non-compression broadcast level transmission;
- ▶ LED Status Indication to monitor the working conditions;
- ▶ super optic dynamic range and free of adjustment;
- ▶ 1470~1610nm CWDM wavelengths optional;
- ▶ industry level ultra-broad temperature range (-20°C ~+70°C), adaptable to various environments;



Overview

LNK-M3G-1V Series Mini-type 3G/HD-SDI Fiber Converter supports 1-channel 3G/HD-SDI Video (audio embedded) & Tally & Reverse RS485 signal transmitted via fiber optical cable, and monitor the signal locally over a 3G/HD-SDI loop output. E-link 3G/HD-SDI Video over Fiber Converters includes one transmitter and one receiver for 1080P 3G/HD-SDI signal.

Application

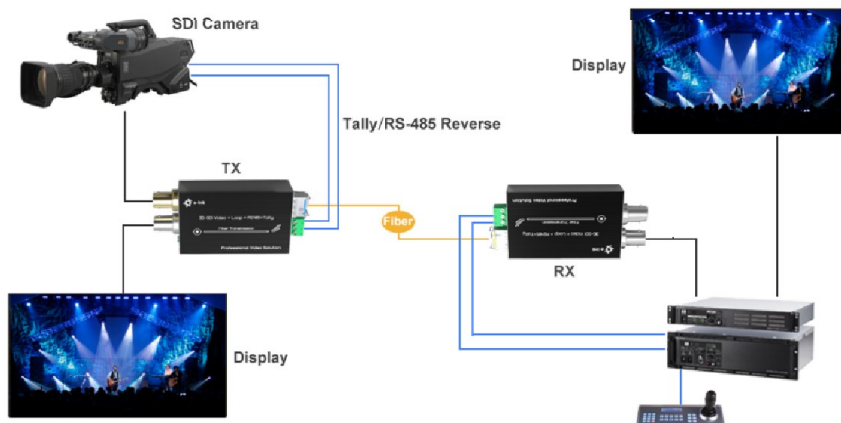

Technical Indexes

Fiber Optical interface	
Fiber interface	Simplex LC
Transmission distance	550m-20Km
Wavelength	1310nm/1550nm
Video	
Video interface	BNC
Video input/output impedance	75Ω
Video input/output voltage	Typical:1Vpp, Min 0.5Vpp, Max 1.5Vpp
Video Bits Rate	Max 3.2Gb/s
Differential gain (10%~90% APL)	<1%
SDI format support	625/25 PAL
	525/29.97 NTSC, 525/23.98 NTSC
	720p50, 720p59.94
	1080i 23/24/30/50/59.94
	1080P 23.98/24/30/50/60
Video SDI standard	270Mbps (SD-SDI), 1.485Gbps/M(HD-SDI)
	SMPTE425M3Gb/s Mapping(3G-SDI)
	SMPTE424M 3Gb/s serial interface(3G-SDI)
Data	
Physical interface	Industrial standard screw terminal
Data type	Tally & Reverse RS485
Frequency/Rate support	Max. 115200bps for RS422 Max. 57600bps for RS485
BER	<10 ⁻⁹
Electrical	
Power adaptor	DC 5V
Power consumption	<5W
LED Indicator	
SDI	SDI video
P/T	Power Supply
Mechanical	
Dimensions (LxWxH)	73 x 44 x 17 mm (TX)
	73 x 44 x 17 mm (RX)
	185 x 132 x 100 mm (Package)
Weight	75g (TX)
	75g (RX)
	450g (Package)
Casing	Aluminum Case
Mounting Options	Desktop
Environmental	
Working Temperature	-20℃~+70℃
Storage Temperature	-40℃~+80℃
Working Humidity	0~95%
MTBF	≥100000 hours

Ordering Information

Model	Description
LNK-M3G-1V-MM	Mini-type 3G-SDI to Fiber Converter with Tally & Reverse RS485 and loop out, MMF , LC Fiber Connector 500 meters , including Transmitter and Receiver, used by pairs
LNK-M3G-1V-20	Mini-type 3G-SDI to Fiber Converter with Tally & Reverse RS485 and loop out, SMF , LC Fiber Connector 20KM , including Transmitter and Receiver, used by pairs
LNK-M3G-1V-40	Mini-type 3G-SDI to Fiber Converter with Tally & Reverse RS485 and loop out, SMF , LC Fiber Connector 40KM , including Transmitter and Receiver, used by pairs

Interface & LED

